

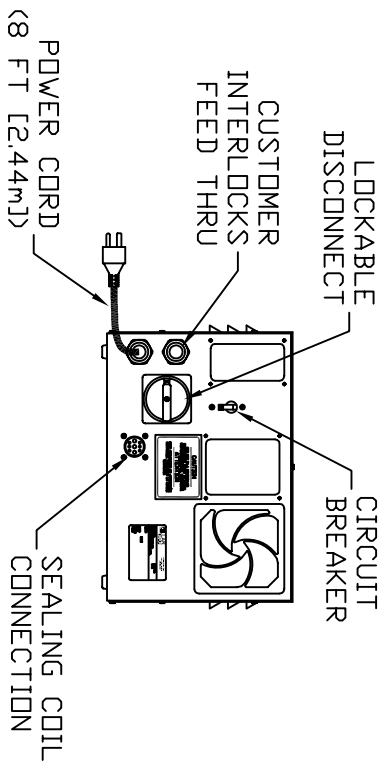
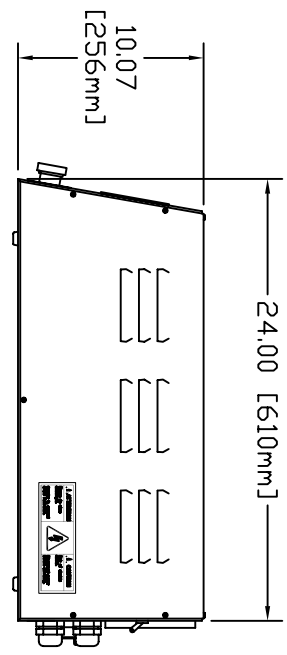



- POWER SUPPLY SPECIFICATIONS:**
1. INPUT VOLTAGE: 120VAC ±10% DR 240VAC ±10% SINGLE PHASE, 50/60HZ
  2. AMBIENT TEMPERATURE: 40° C MAXIMUM.
  3. 6" [154mm] CLEARANCE TO BE KEPT ON SIDES AND BACK FOR COOLING.
  4. NEMA 1 CORROSION RESISTANT.
  5. SEE BG2070-27 FOR HAND HELD SEALING COIL DETAILS.

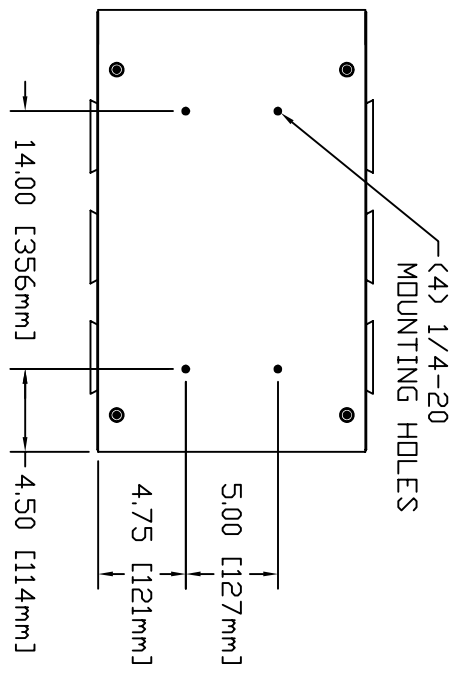

**HAND HELD SEALING COIL**

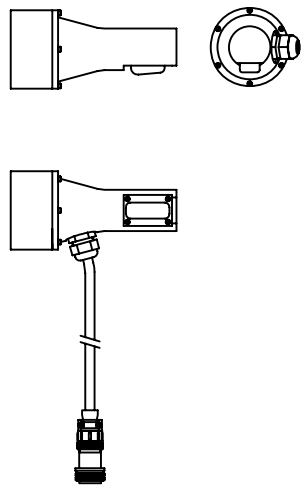

THIS PRINT IS THE PROPERTY OF PILLAR TECHNOLOGIES AND IS LOANED TO THE RECIPIENT SUBJECT TO RETURN UPON DEMAND. ITS CONTENTS ARE CONFIDENTIAL AND MUST NOT BE COPIED OR SUBMITTED TO OUTSIDE PARTIES FOR USE OR EXAMINATION

D	ANDED METRIC DIMENSIONS	EJU	11-01-05
C	ANDED PLAIN VIEW	RAK	3-5-04
B	MOVED E-STOP	RAK	9-4-03
A	BG2070-1 WAS BG2074-1	RAK	10-25-02
RE	DESCRIPTION	APPD	DATE
	FINISH SPEC	DESIGNER	DATE
		ENGINEER	
		TITLE	
		PILLAR TECHNOLOGIES HARTLAND, WISCONSIN 53029	
		OUTLINE DRAWING UNIFOILER 1KW-H	
		DWG NO	REV
		CG2070-16	D
		SCALE 1/8" = 1"	SHEET 1 OF 1