
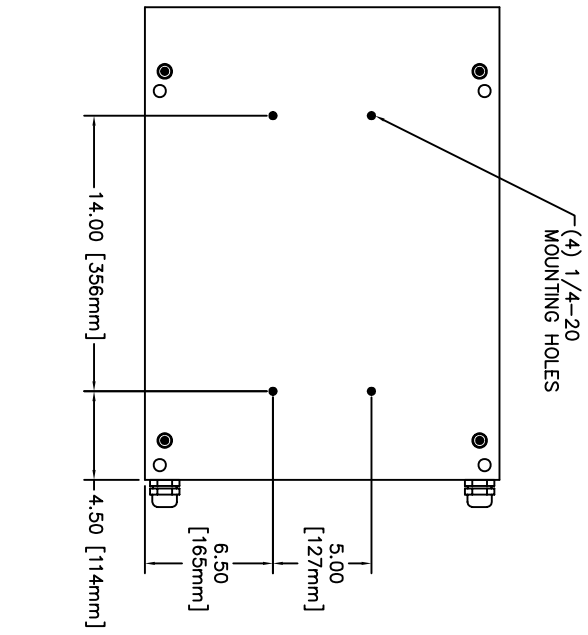
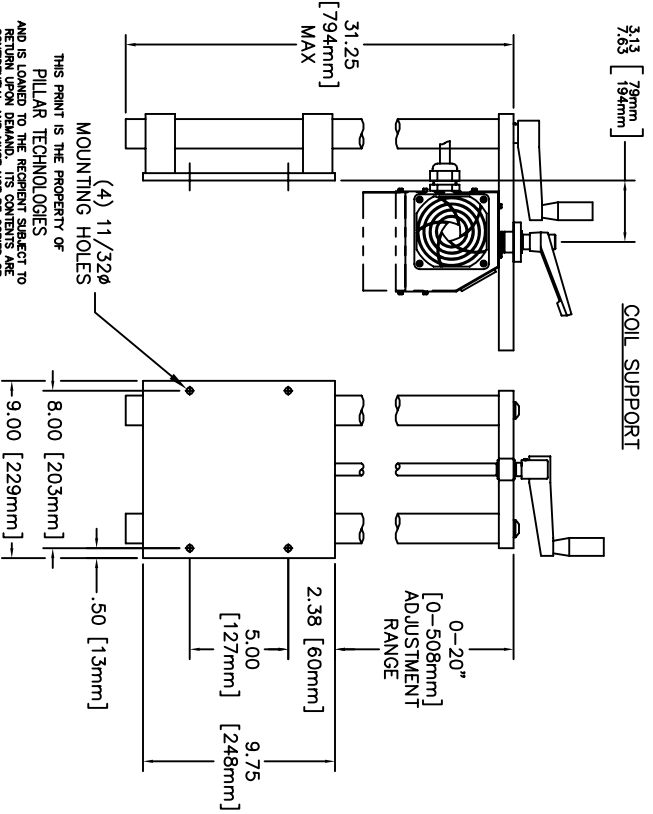


- POWER SUPPLY SPECIFICATIONS:**
1. INPUT VOLTAGE: 208VAC ±10% OR 240VAC ±10%, SINGLE PHASE 50/60 Hz
 2. 40°C MAXIMUM AMBIENT TEMPERATURE
 3. 6" [154mm] CLEARANCE TO BE KEPT ON SIDES AND BACK FOR COOLING
 4. NEMA 1 CORROSION RESISTANT
 5. SEE THE FOLLOWING OUTLINE DRAWINGS FOR SEALING COIL DETAILS:

UNIVERSAL COIL: BG2074-4
CHANNEL COIL: BG2074-18

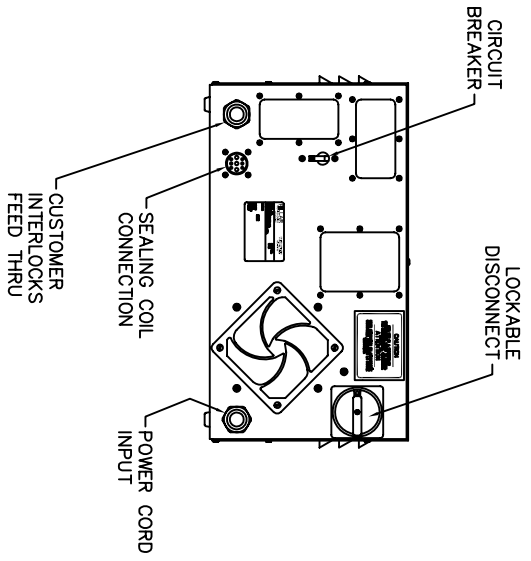

REV	DESCRIPTION	APP'D	DATE	REF. DIMS
C	ADDED METRIC DIMENSIONS	RAK	3-4-04	
B	ADDED PLAN VIEW	RAK	3-4-04	
A	UPDATED COIL OUTLINE NUMBERS	RAK	9-2-03	
REV	DESCRIPTION	APP'D	DATE	REF. DIMS
	UNIVERSAL COILS: 208VAC ±10% OR 240VAC ±10%, SINGLE PHASE 50/60 Hz	RAK	3-5-04	
	40°C MAXIMUM AMBIENT TEMPERATURE			
	6" [154mm] CLEARANCE TO BE KEPT ON SIDES AND BACK FOR COOLING			
	NEMA 1 CORROSION RESISTANT			
	SEE THE FOLLOWING OUTLINE DRAWINGS FOR SEALING COIL DETAILS:			
	UNIVERSAL COIL: BG2074-4			
	CHANNEL COIL: BG2074-18			
DWG NO	CG2074-1			
REV	C			
SCALE	1 : 1			
SHEET	1			
OF	1			

THIS PRINT IS THE PROPERTY OF PILLAR TECHNOLOGIES AND IS LOANED TO YOU FOR YOUR REFERENCE ONLY. IT IS NOT TO BE REPRODUCED, COPIED, OR SUBMITTED TO OUTSIDE PARTIES FOR USE OR EXAMINATION.

PILLAR TECHNOLOGIES
A Division of Universal Coil Technologies, Inc.
Hartland, Wisconsin 53029

OUTLINE DRAWING UNIFOLIER 2KW-C