
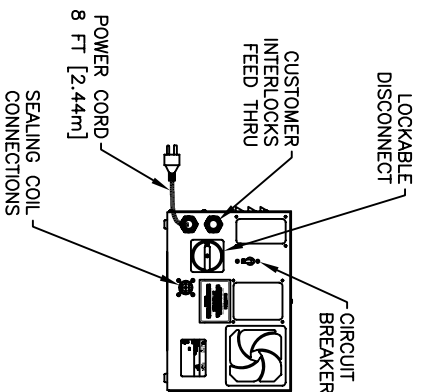
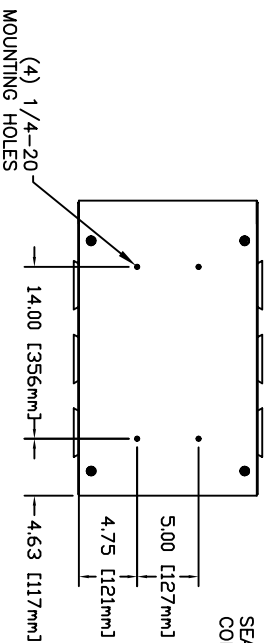

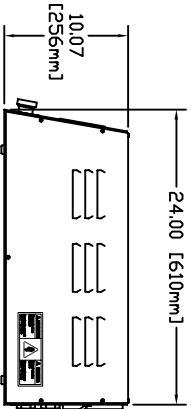

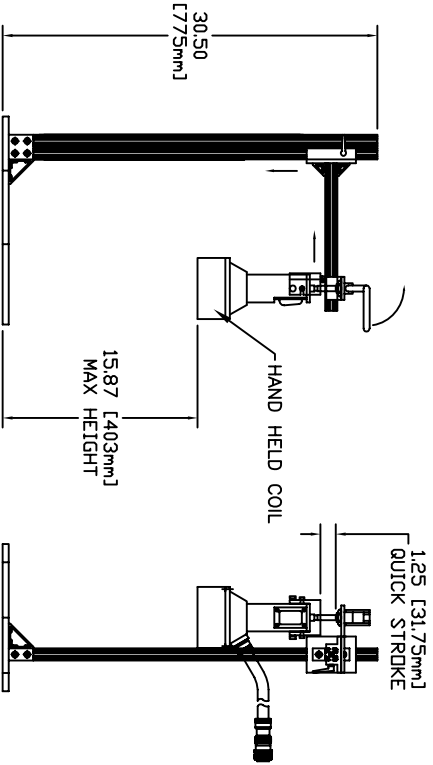


POWER SUPPLY SPECIFICATIONS:

1. INPUT VOLTAGE: 120VAC ±10% OR 240VAC ±10% SINGLE PHASE, 50/60 HZ.
2. AMBIENT TEMPERATURE: 40° C MAXIMUM.
3. 6" [154mm] CLEARANCE TO BE KEPT ON SIDES AND BACK FOR COOLING.
4. NEMA 1 CORROSION RESISTANT.

SEALING COIL AND SUPPORT SPECIFICATIONS

5. SEE THE SEALING COIL OUTLINE DRAWING #BG2070-27 FOR DETAILS
6. SEALING COIL IS ADJUSTABLE VERTICALLY AND HORIZONTALLY
7. INDUCTION COIL IS EQUIPPED WITH FOIL SENSOR TO AUTOMATICALLY START SEALER WHEN FOIL IS PRESENT
8. INDUCTION COIL IS MADE OF PLASTIC
9. STAND IS MADE OF ANODIZED ALUMINUM AND STAINLESS STEEL
10. "VEE" IN BASE IS FOR CENTERING BOTTLE

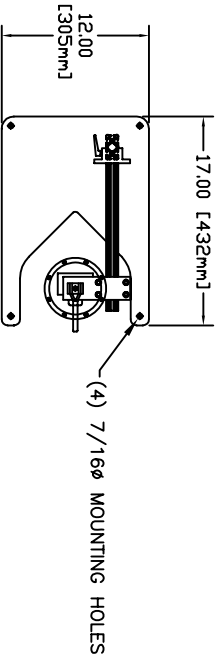

REV	DESCRIPTION	APP'D	DATE
A	ADDED METRIC DIMENSIONS	EJU	11-2-05
<p>PILLAR TECHNOLOGIES An ITW Company</p> <p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ± .01 FINISH: MILL MATERIAL: 6061 ALUMINUM</p>			
SCALE	1 : 1	SHEET	1 OF 1
REV	DESCRIPTION	DATE	FILE NAME
A	OUTLINE DRAWING UNIFOLIER 1KW-H SEMI - AUTOMATIC	6-8-05	CG2070-24
REV	DESCRIPTION	DATE	FILE NAME
A	CG2070-24	6-8-05	CG2070-16

THIS PRINT IS THE PROPERTY OF PILLAR TECHNOLOGIES AND IS LOANED TO YOU. IT IS TO BE RETURNED UPON DEMAND. ITS CONTENTS ARE CONFIDENTIAL AND MUST NOT BE COPIED OR SUBMITTED TO OUTSIDE PARTIES FOR USE OR EXAMINATION.