

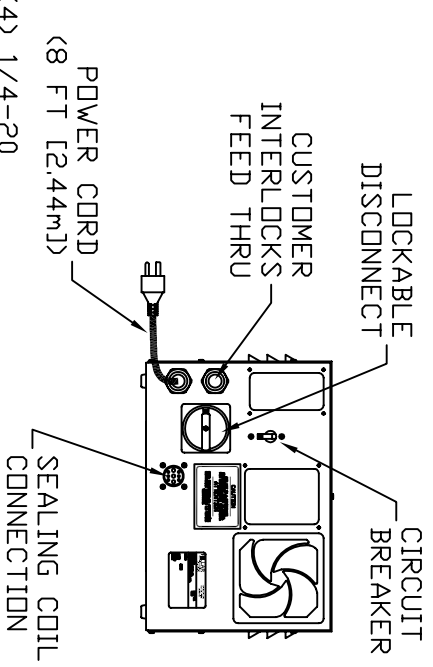
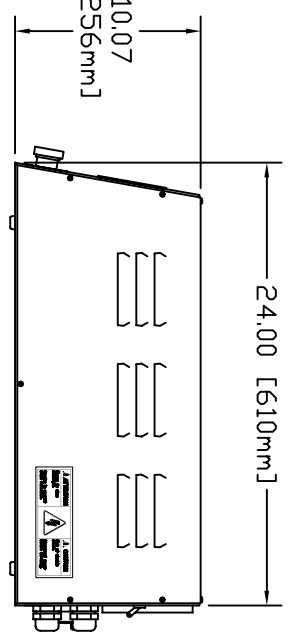



- POWER SUPPLY SPECIFICATIONS:**
1. INPUT VOLTAGE: 120VAC ±10% DR 240VAC ±10% SINGLE PHASE, 50/60 HZ.
 2. AMBIENT TEMPERATURE: 40°C MAXIMUM.
 3. 6" [154mm] CLEARANCE TO BE KEPT ON SIDES AND BACK FOR COOLING.
 4. NEMA 1 CORROSION RESISTANT.
 5. SEE THE SEALING COIL OUTLINE DRAWING #BG2070-12 FOR DETAILS
 6. STAND AND COIL MADE OF STAINLESS STEEL, ANODIZED ALUMINUM, AND PLASTIC.

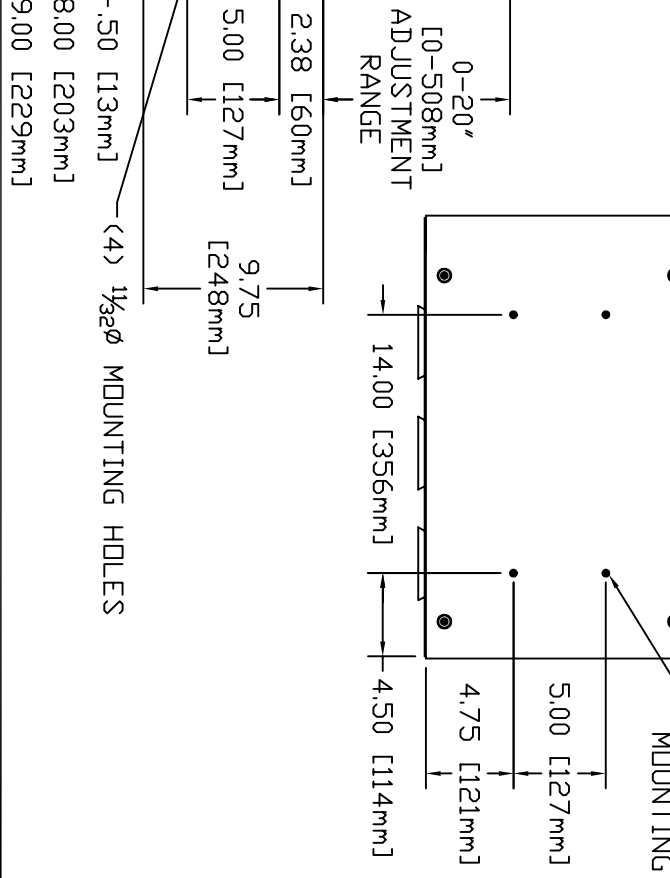

COIL SUPPORT

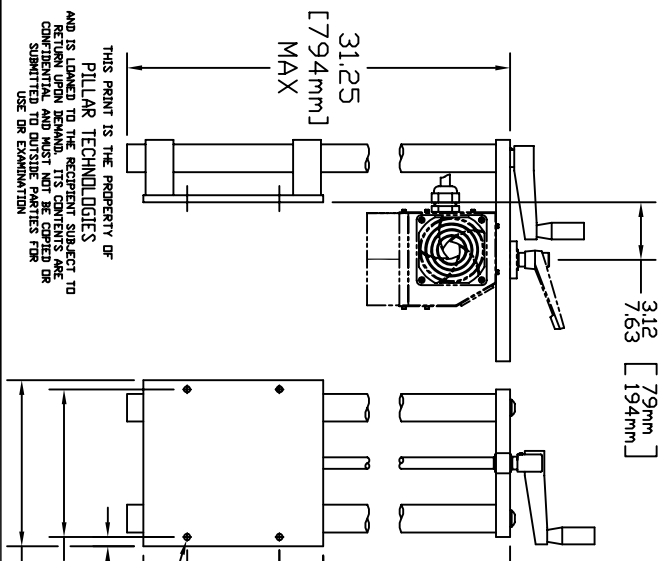

| REV | DESCRIPTION | APPD | DATE |
|--------|-------------------|--|---------|
| C | ADDED METRIC DIMS | EJU | 11-2-05 |
| B | ADDED PLAN VIEW | RAK | 3-5-04 |
| A | UPDATED NOTES | RAK | 9-4-03 |
| REV | DESCRIPTION | APPD | DATE |
| | DATE | 09-05-01 | |
| | DWG BY | RAK | |
| | CHECKER | | |
| | ENGINEER | | |
| | TITLE | PILLAR TECHNOLOGIES HARTLAND, WISCONSIN 53029 | |
| | OUTLINE DRAWING | | |
| | UNIFOILER 1KW-C | | |
| DWG NO | CG2070-17 | REV | C |
| SCALE | 1/8" = 1" | SHEET | 1 OF 1 |

THIS PRINT IS THE PROPERTY OF PILLAR TECHNOLOGIES AND IS LOANED TO YOU FOR YOUR USE ONLY. IT IS TO BE RETURNED TO PILLAR TECHNOLOGIES AND MUST NOT BE COPIED OR SUBMITTED TO OUTSIDE PARTIES FOR USE OR EXAMINATION.