


POWER SUPPLY SPECIFICATIONS:

1. 240VAC (3 PHASE) $\pm 10\%$ 50/60 Hz
2. 40°C MAXIMUM AMBIENT TEMPERATURE
3. 6" [154mm] CLEARANCE TO BE KEPT ON SIDES AND BACK FOR COOLING
4. NEMA 1 CORROSION RESISTANT
5. SEE THE FOLLOWING OUTLINE DRAWINGS FOR SEALING COIL DETAILS:

UNIVERSAL COIL: BG2077-5
CHANNEL COIL: BG2074-18

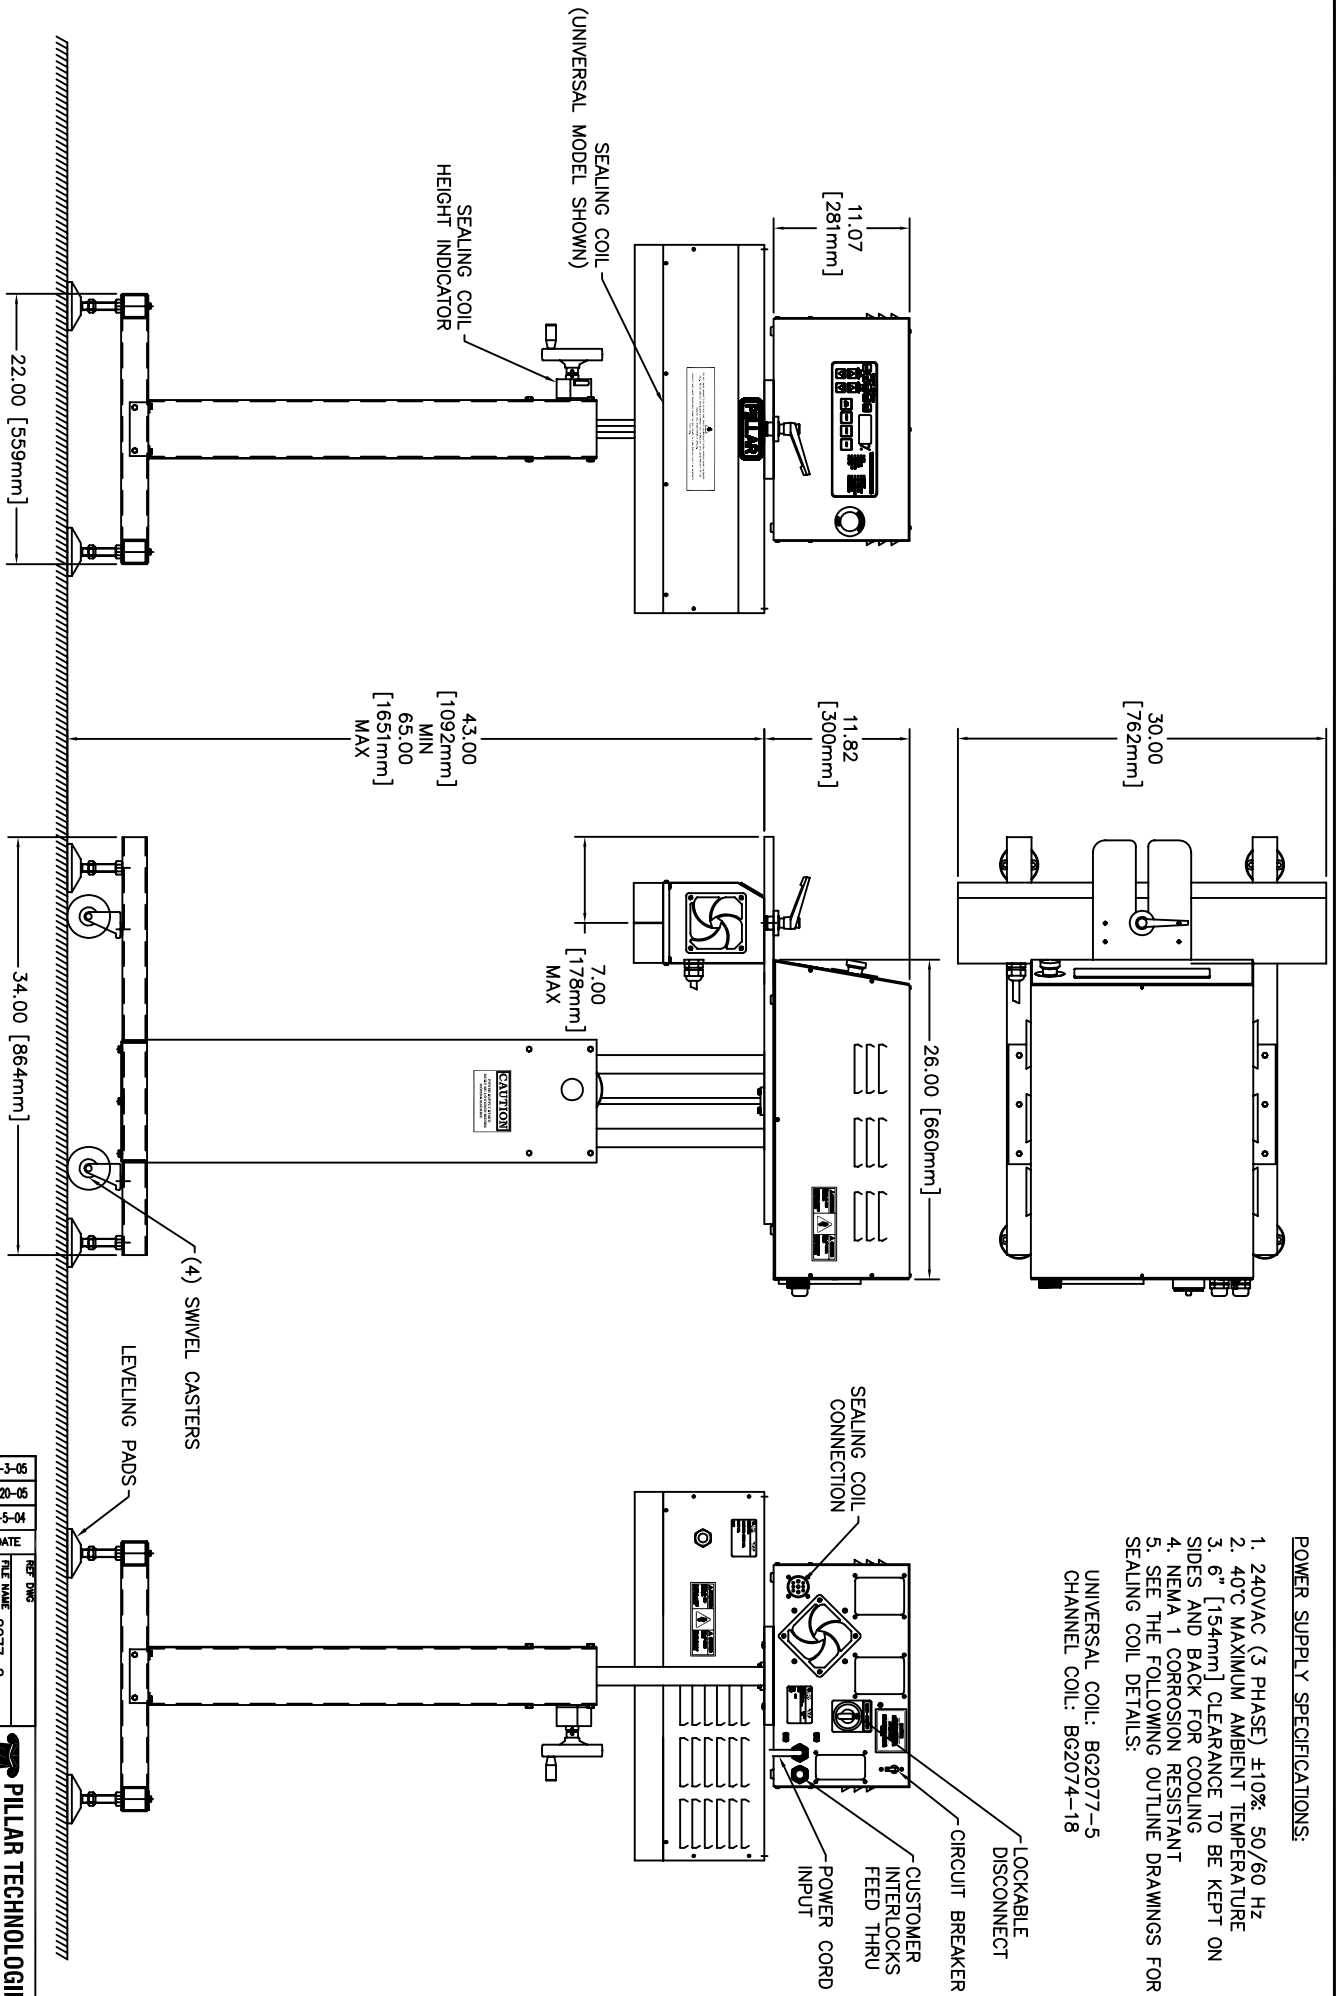

THIS PRINT IS THE PROPERTY OF
PILLAR TECHNOLOGIES
AND IS LOANED TO THE REQUESTOR SUBJECT TO
RETURN UPON DEMAND. ITS CONTENTS ARE
CONFIDENTIAL AND MUST NOT BE COPIED OR
SUBMITTED TO OUTSIDE PARTIES FOR
USE OR EXAMINATION

REV	DESCRIPTION	APP'D	DATE
C	ADDED METRIC DIMENSIONS	EJU	11-3-05
B	ADDED COIL HEIGHT INDICATOR	RAK	1-20-05
A	ADDED PLAN VIEW	RAK	3-5-04
REV			

FILE NAME	2077-2
DATE	10-29-02
DESIGNED BY	RAK
CHECKED BY	RAK
ENGINEER	

UNITED STATES PATENT AND TRADEMARK OFFICE	
REGISTERED PATENT OFFICE	
TELEPHONE 512/338-1000	
FAX 512/338-1005	
MAIL	
FINISH	
SPEC	

DWG NO	CG2077-2
REV	C
SCALE	1 : 1
SHEET	1 of 1

PILLAR TECHNOLOGIES
A Division of Wilson Prose Systems, Inc.
Hartford, Wisconsin 53029

OUTLINE DRAWING
UNIFOILER 4KW-U