


POWER SUPPLY SPECIFICATIONS:

1. INPUT VOLTAGE: 240VAC (3 PHASE) +10%/-15% 50/60 Hz
2. 40°C MAXIMUM AMBIENT TEMPERATURE
3. 6" [154mm] CLEARANCE TO BE KEPT ON SIDES AND BACK FOR COOLING
4. NEMA 1 CORROSION RESISTANT
5. SEE THE FOLLOWING OUTLINE DRAWINGS FOR SEALING COIL DETAILS:

UNIVERSAL COIL: BG2077-5

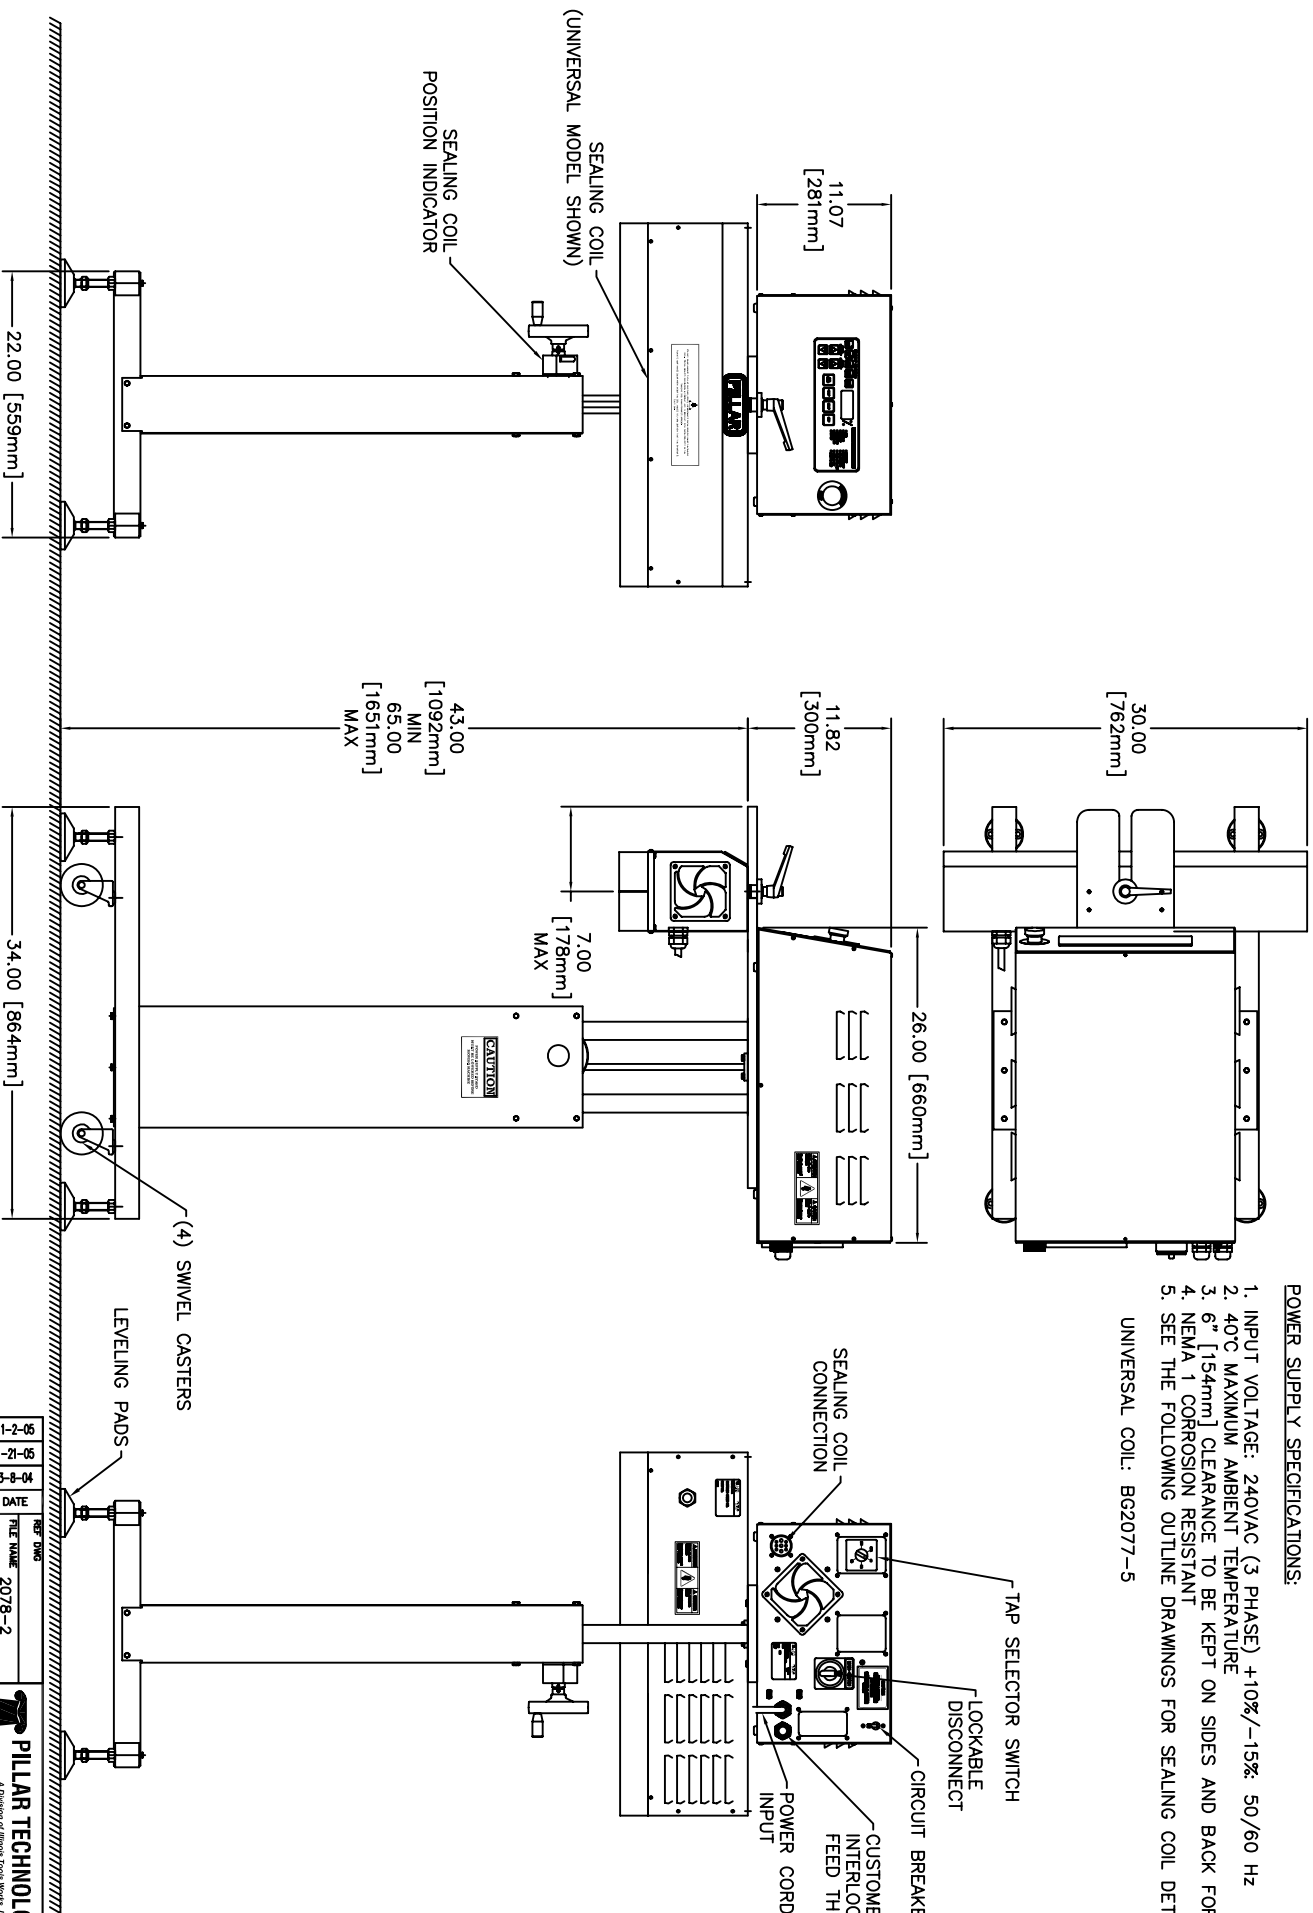

THIS PRINT IS THE PROPERTY OF
 PILLAR TECHNOLOGIES
 AND IS LOANED TO THE USER FOR THEIR USE ONLY.
 RETURN TO PILLAR TECHNOLOGIES FOR
 REPRODUCTION, AND MUST NOT BE COPIED OR
 SUBMITTED TO OUTSIDE PARTIES FOR
 USE OR EXAMINATION

REV	DATE	APP'D	DESCRIPTION
A	3-8-04	RAK	ADDED PLAN VIEW
B	1-21-05	RAK	ADDED COIL HEIGHT INDICATOR
C	11-2-05	EJU	ADDED METRIC DIMENSIONS

DATE	10-1-03	DESIGN ENGINEER
CHECKER	RAK	ENGINEER
FILE NAME	2078-2	
REV DATE	10-1-03	DESIGN ENGINEER
UNLESS OTHERWISE SPECIFIED		
TOLERANCES UNLESS OTHERWISE SPECIFIED		
FRACTIONS & 1/2 ANGLES & 1'		
DECIMALS & ANGLES & 1/2		
FINISH		
SPEC		

TITLE	OUTLINE DRAWING UNIFOLIER 6KW-U
DWG NO	CG2078-2
REV	C
SCALE	1 : 1
SHEET	1 OF 1

PILLAR TECHNOLOGIES
A Division of Illinois Tool Works, Inc.
Hartland, Wisconsin 53029